


GROUND LEVEL VENT BOX



The Gas Level Vent Box is designed to effectively disperse passively vented gas safely into the atmosphere. The vents should be positioned near the building perimeter or in soft landscape.

In areas of vehicle traffic, the ground level vent box can be positioned underneath a gully grate to suit road traffic (design of bearing load to be approved by the engineer).

SPECIFICATIONS

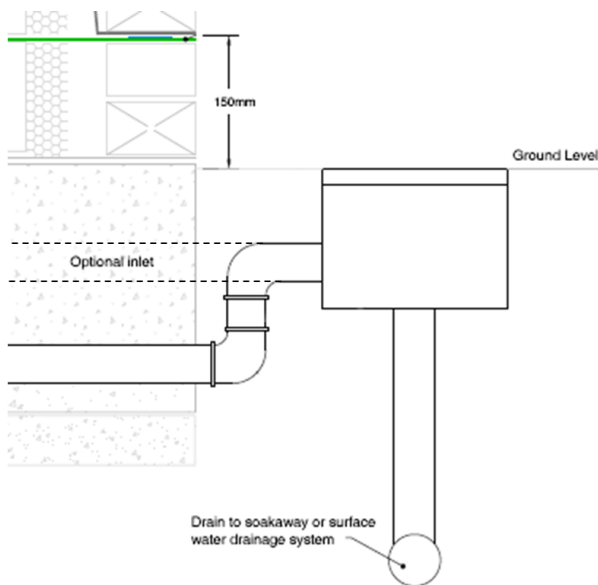

Property	Unit	Value
Dimensions (L,W,H)	mm	500, 150, 275
HDPE Wall thickness	mm	4
HDPE Twinwall pipe inlet/outlet	mm	110
Holed Lid		
Thickness	mm	1.6
Hole diameter	mm	6
Slotted Lid		
Thickness	mm	1.6
Slot width	mm	8
Air flow		
Holed Lid	mm ²	5,994
Slotted Lid	mm ²	19,200

PRODUCT DETAILS

Lids are available in stainless steel or galvanised steel. Stainless steel screws are provided. Base connection should be to storm water collection, land drainage or soakaway system. Only for use in areas that sustain light foot traffic.

INSTALLATION

Correct Installations/specification should be sought from the specifier, ground engineers or the structural engineers to ensure the unit is suitable for the intended location.

Tel: 01622 738787

E-mail: orders@gdsenterprise.com