


RECTANGULAR GULLY VENT



The Rectangular Gully Vent is designed to effectively disperse passively vented gas safely into the atmosphere. The vents should be used near the building perimeter or in soft landscape.

In areas of vehicle traffic, the rectangular gully vent can be positioned underneath a gully grate to suit road traffic (design of bearing load to be approved by the engineer).

SPECIFICATIONS

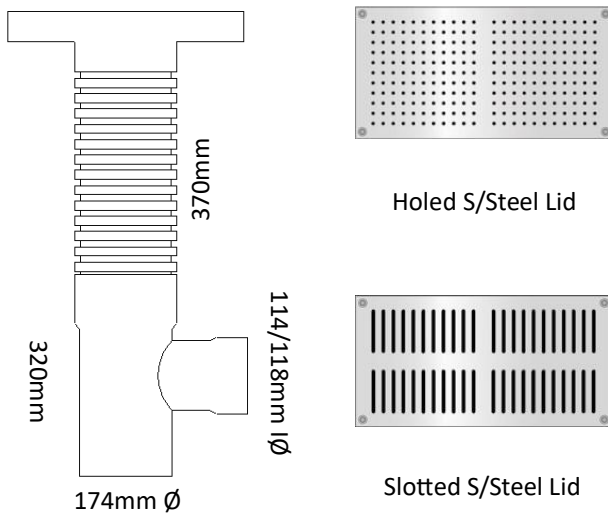

Property

Unit

Value

Property	Unit	Value
Gully vent wall thickness	mm	4
Unit height (including gully)	mm	690
Twinwall and pipe composite	mm	640
Holed Stainless Steel Lid (L x W)	mm	420 x 210
Thickness	mm	1.6
Hole diameter	mm	6
Slotted Stainless Steel Lid (L x W)	mm	420 x 210
Thickness	mm	1.6
Slot width	mm	6
Air flow		
S/Steel Holed Lid	mm ²	6,500
S/Steel Slotted Lid	mm ²	18,000

PRODUCT DETAILS

Stainless steel screws are provided with the stainless steel Holed Lid. Base connection should be to storm water collection, land drainage or soakaway system.

INSTALLATION

Install around the perimeter of the building (grass verges, gravel beds, planter areas etc). Only for use in areas that sustain light foot traffic.

Correct Installations/specification should be sought from the specifier, ground engineers or the structural engineers to ensure the unit is suitable for the intended location.

Tel: 01622 738787

E-mail: orders@gdsenterprise.com